

NUQ SERIES ENGINEERING INFORMATION

The B-15DP is a self-powered front-loaded single 15" subwoofer enclosure incorporating integral amplifiers and control electronics. The use of DSP amplifier technology ensures an exact match between amplifier and speaker for optimum acoustic output, and offers exceptional ease of use by having the entire electro-acoustic system in one convenient, easily transportable physical package. The B15DP is designed for use in portable speech and music sound reinforcement applications.

The B-15DP features a new generation of innovative Class D power amplifier module, utilising revolutionary 96kHz DSP technology to give operating efficiency in excess of 90%.

The B-15DP consists of a custom 15" neodymium low frequency driver in compact vented enclosure optimally tuned for extended low frequency response.

The cabinet is constructed from 18mm (3/4") birch plywood, screwed and glued together for maximum strength and rigidity, and it is finished as standard in durable semi-matt black textured paint. A perforated steel mesh grille backed with reticulated foam protects

the drive units. Heavy duty corner protectors are fitted and recessed flush handles are provided for easy lifting and carrying. An integral pole mount socket is fitted to the top of the enclosure to allow two-way cabinets to be mounted at the correct height above the subwoofer. Internal M10 rigging points are fitted on the sides, top and bottom to enable rigging in fixed installations.

The rear panel carries a fully integrated Class D amplifier and control electronics module, and incorporates high performance limiters set to optimise the continuous power and excursion threshold for the specific loudspeaker model. A Neutrik™ Powercon connector provides mains input to the unit—the switch mode power supply is auto-sensing over a range from 100 volts to 240 volts—and 3-pin XLR's are used for input and parallel link signal connections. RJ45 network connectors enable multiple loudspeakers to be controlled and monitored over a BVNet network using TurboDrive™ software.

The B-15DP can be fitted with optional heavy duty T-4 wheels to aid transportation.



FEATURES

- Digitally self-powered
- High efficiency
- Pole mount socket
- M10 rigging points

APPLICATIONS

- Front of house
- Theatre
- Houses of Worship
- Corporate / industrial

DIMENSIONS (HxWxD)	464mm x 574mm x 620mm (18.3" x 22.6" x 24.4")	
NET WEIGHT	39 kg (85.8lbs)	
COMPONENTS	1 x 15" (381mm) LF driver	
FREQUENCY RESPONSE¹	45Hz - 120Hz ±4dB	
MAXIMUM SPL	126dB continuous ² , 132dB peak ³	
CONSTRUCTION	18mm (3/4") birch plywood; rebated, screwed and glued. Finished in black semi-matt textured paint. Four recessed carrying handles. Integral pole mount socket	
GRILLE	Powder coated perforated steel with acoustically transparent reticulated foam	
CONNECTORS	Input: (1) XLR female, Link: (1) XLR male, pin 2 hot; Neutrik Powercon; (2) RJ45 network port	
FLYING HARDWARE	M10 rigging points for use with M10 eyebolts	
AMPLIFIER	TYPE:	Class D inc SMPA and networked DSP
	POWER OUTPUT:	1600 watts continuous @ 8 ohms (1kHz, 0.01% THD)
	DYNAMIC RANGE:	110dB
	INPUT CLIP:	10dBu
	BANDWIDTH:	20Hz - 20kHz ±0.5dB
	POWER REQUIREMENTS:	100V to 240V AC @ 50/60Hz
OPTIONS	Optional colour: white textured paint	
SPARES AND ACCESSORIES	LS-1526	15" (381mm) LF loudspeaker
	RC-1526	Recone kit
	MG-B15	Replacement grille
	T-4	Heavy duty wheels (set of four)
	PA-90	90cm straight pole
	PA-120	120cm straight pole


Notes

¹Measured on axis

²Unweighted diode-clipped pink noise. Measured in a half space environment

³Verified by subjective listening tests of familiar program material, before the onset of perceived signal degradation

FREQUENCY RESPONSE

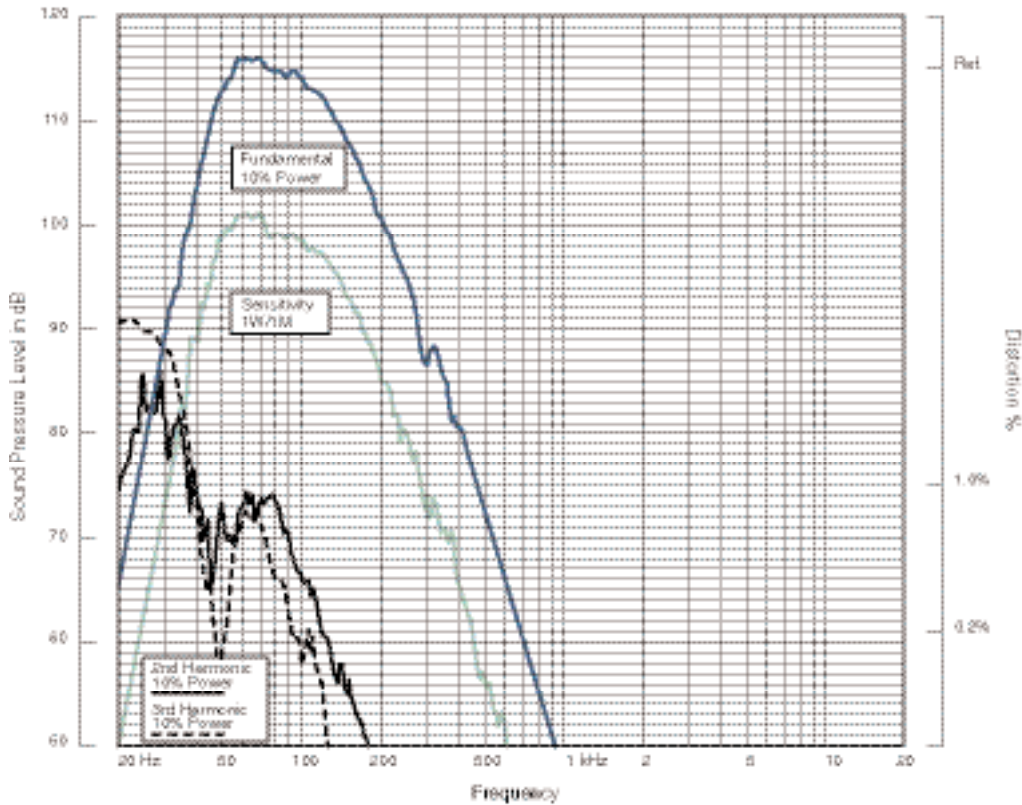

Impedance A constant current circuit was used to measure the impedance. **Frequency response** The frequency response shown was obtained by feeding a swept sine wave through an unprocessed loudspeaker system in a full space environment. The position of the microphone was vertically on-axis at a distance of 2 metres, then scaled to represent 1 metre. **2nd & 3rd Harmonic Distortion** Distortion measurements were obtained using an Audio Precision harmonic distortion analysis system and comply with AES recommendations for enclosure measurement (AES paper ANSI S4-26-1984). **Data Conversion** All graphs were digitally generated using the APEX custom software system, designed to translate data derived from Audio Precision 'System One' test equipment into AutoCAD™. This program enables graphical information to be plotted to a high degree of accuracy.

NOTES ON MEASUREMENT CONDITIONS

**ARCHITECTURAL
& ENGINEER'S
SPECIFICATIONS**

The system shall be of the self-powered subwoofer type consisting of one front-loaded 15" (381mm) low frequency loudspeaker. Performance specifications of a typical production unit shall meet or exceed the following: frequency response, measured with swept sine wave input, shall be flat within $\pm 4\text{dB}$ from 45Hz to 120Hz. Maximum SPL (peak) measured with music program at stated amplifier input shall be 132dB. Dimensions: 464mmH x 574mmW x 620mmD (18.3"H x 22.6"W x 24.4"D). Weight: 39kg (85.8lbs). The loudspeaker system shall be the Turbosound B-15DP. No other loudspeaker shall be acceptable unless submitted data from an independent test laboratory verify that the above combined performance / size specifications are equalled or exceeded.

DIMENSIONS

